

Datasheet

Galaxy Station - Medium

CAT NO. 659184



Operating Voltage	POE 48V
IP Rating	IP67
Wireless Transmission	915 – 928 MHz
Power Consumption	15W
Connection	RJ45 (Ethernet 10/100)
Wireless coverage vertical*	12 floors from center (+/- 6 floors)
Wireless coverage horizontal*	Up to 1km in direct line of sight Up to 250m range in urban situation
Operating Temperature	-20°C to 55°C
Humidity	95%
Impact resistance	IK08
UV resistance	UL508
User Interface	Power indicator : Green = On
Weight	2kg
Compliance	IEC 60950-1 AS-NZS4268 EN 55022

*Coverage will vary depending on the environment and application. A site survey MUST be done to determine the best position of the Galaxy Station for optimum coverage.



GALAXY™
CONNECTED EMERGENCY LIGHTING SYSTEM




Galaxy Station - Medium

CAT NO. 659184



- Wireless long range and deep indoor coverage
- Bidirectional communications with emergency luminaries
- Network and application encryptions ensures two levels of security during communications
- Adaptive Data Rate (ADR) transmission ensures all luminaries are connected within range
- Plug and play into existing IT infrastructure for ease of remote access
- 5 year warranty

Dimensions

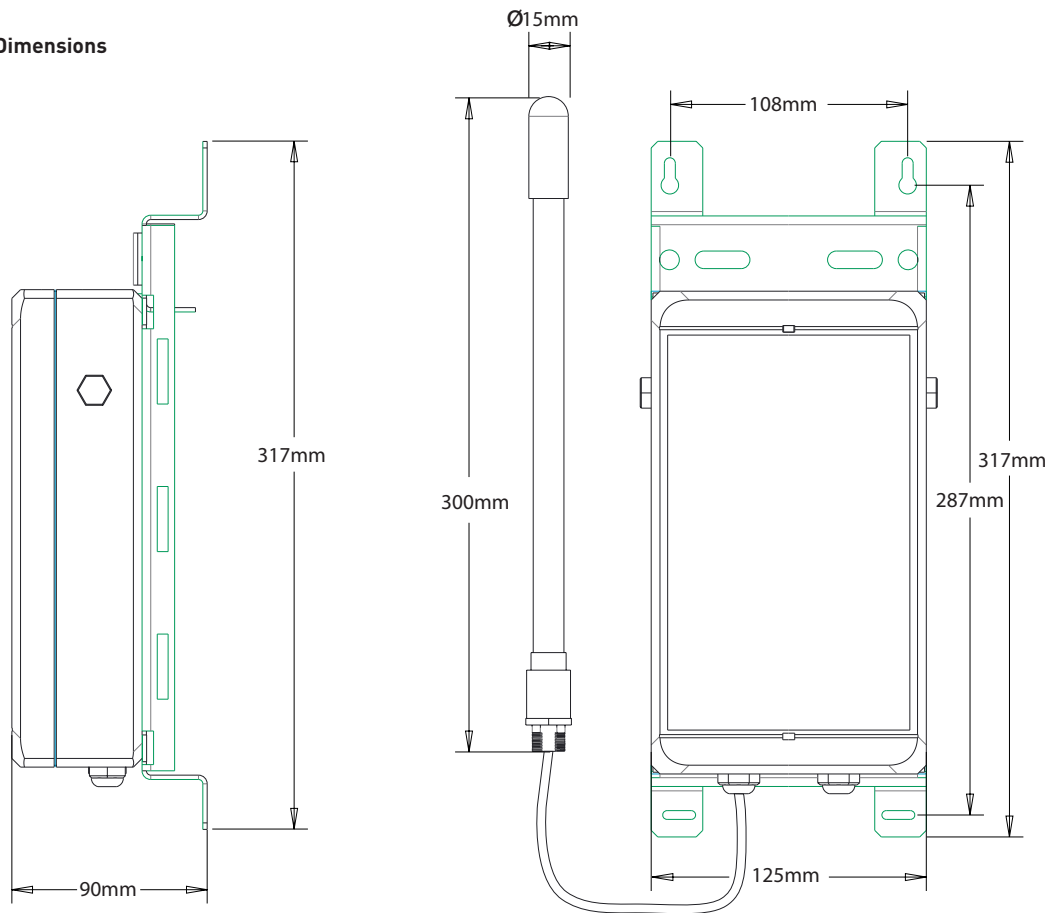

Legrand - AUS
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - NZ
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

LEG2107_B

12_2018